



**BORMA WACHS**<sup>®</sup>  
Wood Professional Cosmetics  
& Eco-Finishes

**EXTERIORS**

Special topcoats and maintenance materials for  
**DECKS, TERRACES AND GARDEN FURNITURE**





# Company

We manufacture professional wood cosmetics for an eco-friendly way of life.

For decades BORMA WACHS has been working in the wood care and synthetic surface treatment sector with a sense of responsibility and constant commitment to pursuing three fundamental principles: quality, reliability and flexibility. The dynamism, production capacity, safety and marketability of our products characterise our company profile. As specialists in the professional cosmetics of wood and synthetic surfaces, we offer our customers only the best of the best.



# Certifications

Our products and manufacturing cycles are regularly tested and approved by international institutes.



## VOC FREE

All Borma Wachs branded products comply with the latest European legislation on emissions of potentially harmful substances into the atmosphere and have total regard for the environment and the health and wellbeing of our workers and our customers. With the new ECO PREMIUM - VOC FREE line we are able to offer an uncompromising range, with 100% natural and biodegradable products, with a VOC content reduced to zero.



## IBR CERTIFICATIONS

Borma Wachs products are tested and approved by the Rosenheim Institute for Green Building. The analyses carried out certify our products regarding the content of VOC's, biocides, heavy metals and radioactive material guaranteeing their eco-compatibility with the principles of Green Building. The Company always aims to understand the needs and sensitivity of customers, trying to better interpret the request for sustainable and environmentally friendly treatments coming from the use of renewable raw materials, in order to reduce as much as possible the impact on environment and on the health of users and all stakeholders in our communities.



## EN71.III CERTIFICATION

The Danish laboratories of Eurofins have recognised the compliance of Borma Wachs oils with the EN 71- III regulation on the migration of heavy metals harmful to health, ensuring the safety of the treatments to the point of allowing their use for finishing or maintenance of toys for children.



A modern outdoor terrace at dusk. The scene is dominated by a wooden pergola structure with horizontal slats, casting a warm glow. Below it, a stone fire pit with a long, low opening is filled with glowing embers. The terrace floor is made of wooden planks. In the foreground, a wicker table with a glass top holds a small book. A large, textured vase stands near the table. The background shows a cityscape under a twilight sky with soft clouds and a bright sun setting on the horizon. A large, stylized white graphic element, resembling a checkmark or a stylized 'L', is overlaid on the right side of the image.

**SPECIAL FOR DECKS, TERRACES AND GARDEN FURNITURE**





**BORMA WACHS**<sup>®</sup>  
Wood Professional Cosmetics  
& Eco-Finishes

## The Way of Wood

A lifestyle that respects the human being and the environment.

The passion for the treatment and processing of wood has always inspired Borma Wachs to offer an exceptionally complete choice of natural products for wood, to ensure maximum satisfaction for all those involved and with respect for future generations. Borma Wachs has always been committed to the search for eco sustainable solutions formulated with natural products and perfectly in line with the new international objectives of sustainability and circular economy. The value of Borma Wachs formulations covers the entire life cycle of the products. Initially raw materials from renewable and sustainable vegetal sources are selected for safeguarding the health of those involved in production, application of our products and especially those who live in contact with the flooring, and at the end of its life, the biocompatibility and biodegradability of the treated wood is guaranteed with respect for the natural environment. Our commitment is certified! Our website contains not only all the technical information to make the best use of each product, without risk and without waste, but also the ecological and safety certifications of our products, strictly compliant and guaranteed by the best international organizations.

# Targeted protection

The products suggestions and advices on making the beauty of terraces, flooring and wooden garden furniture last as much as possible.

In the outdoor areas Borma Wachs aims at guaranteeing the necessary protection of the wooden surfaces, maintaining the same special attention to such natural raw materials as oils and waxes. The oils, stains and finishes are proposed in different colors and formulation variants in order to satisfy every need and guarantee lasting protection.











## BORMA WACHS PRODUCTS FOR TERRACES AND EXTERIOR WOODEN FLOORING IN GENERAL



Page 8/9

### **CYCLES FOR CLEANING AND REGENERATING**

Naturaqua Extra Strong Wood Cleaner - Naturaqua Exterior Wood Cleaner -  
Exterior Oil Refresher

Page 10/11

### **DECORATIVE EFFECTS**

Teak Oil - Decking Oil HD

Page 12/13

### **NATURAL EFFECT**

Terrace Oil - Decking Oil Natural

Page 14/15

### **OIL-BASED FINISHES FOR THERMO-TREATED WOOD**

Thermowood Oil

Page 16/17

### **HIGH PERFORMANCE OIL-BASED FINISHES**

Naturaqua Borma Shield - Decking Oil 2k

Page 18/19

### **WATERBORNE OIL FOR WOODEN TERRACES AND DECKS**

Naturaqua Decking Oil

Page 20/21

### **WATERBORNE OIL FOR WPC TERRACES AND DECKS**

Naturaqua WPC Deck Sealer

Page 22/23

### **HIGH PERFORMANCE DECORATIVE EFFECT LACQUERS**

Holz Lasur - Exterior Wood Lack 2k

Page 24/25

### **WATERBORNE HIGH PERFORMANCE DECORATIVE EFFECT LACQUERS**

Naturaqua Holz Lasur - Naturaqua Exterior Wood Lack 2K

## BORMA WACHS PRODUCTS FOR GARDEN FURNITURE

Page 27

### **CYCLES FOR CLEANING AND REGENERATING**

Naturaqua Borma No Grey

Page 28/29

### **WATERBORNE OIL FOR A NATURAL TREATMENT**

Naturaqua Teak Oil

Page 30/31

### **SEMI-GLOSS DECORATIVE EFFECT FINISHING**

Garden Furniture Oil

### Intensive Wood Cleaner - Gel NATURAQUA EXTRA STRONG WOOD CLEANER

An intensive wood cleaner that removes stubborn dirt and previous treatments with an oil or alkyd base. It is also particularly useful to degrease exotic wood particularly rich in oils and extracts. In this case, you are recommended to dilute the product with water 1:1. Wet the surface with plenty of water before treatment to aid penetration.



#### Recommendations for application:

Due to the high concentration of organic substances, Extra Strong Wood Cleaner can change the natural colour of the wood, making it darker. To restore the original colour of the wood follow the process with an application of Borma Exterior Wood Cleaner.

### Wood Cleaner - Gel NATURAQUA EXTERIOR WOOD CLEANER

A waterbased, one component cleaner with active organic ingredients which ensures efficient cleaning and prepares the surface for subsequent treatments, removing dirt residue and lightening the colour of the wood. Specifically for exterior use, the surface should be thoroughly rinsed with water after application.



#### Recommendations for application:

Wet the support with plenty of water by hosepipe or watering can before treatment. Rinse thoroughly and remove all residue.

### Wooden Floor Cleaner NATURAQUA DECK SOAP

Suitable for all types of wood finishes and ideal for routine cleaning of decking, fencing, furniture and other exterior surfaces, oiled or lacquered. It efficiently removes dirt and grease without damaging the wood. Suitable for daily use. Dilute 5-10% of the product with mains water.



#### Recommendations for application:

Apply the diluted product using soft brushes or synthetic mops, rub lightly and rinse.

### Maintenance Oil EXTERIOR OIL REFRESHER

Exterior Oil Refresher replenishes and regenerates every surface type, giving enhanced protection to the original oil finish of the manufactured piece. The presence of UV filters and special additives protect the wood from harmful agents, from direct sunlight and adverse weather conditions. It highlights the natural beauty of the wood with a natural, satin effect.



#### Recommendations for application:

Recommended for seasonal maintenance of flooring and surfaces in general.





## CYCLES TO CLEAN AND REGENERATE:

### Extra Strong Wood Cleaner + Exterior Wood Cleaner



CYCLE FOR DEEP RESTORATION AND SUBSEQUENT TRADITIONAL OIL-BASED TREATMENT		
Before applying the product, rinse the surface with plenty of water		
1	<b>0091 Naturaqua Extra Strong Wood Cleaner</b>	<ul style="list-style-type: none"> <li>• Apply abundantly</li> <li>• Working time: 15-30 min.</li> <li>• Approx. yield: 10 m<sup>2</sup>/Lt.</li> </ul>
Rub the surface and rinse with water. Proceed with the next application on wet wood.		
2	<b>0075 Naturaqua Exterior Wood Cleaner</b>	<ul style="list-style-type: none"> <li>• Apply evenly</li> <li>• Drying time: 4-6h at 20°C</li> <li>• Approx. yield: 10 m<sup>2</sup>/Lt.</li> </ul>
For a particularly neat result we recommend sanding the surface before applying the finishing.		
Reccomendations for a subsequent finishing: ideal for oils as Terrace Oil, Thermowood Oil, Teak Oil, Decking Oil HD. Avoid waterborne products.		

### Naturaqua Exterior Wood Cleaner + Naturaqua Deck Soap Cleaner



CYCLE FOR CLEANING AND RESTORATION, TO BE FINISHED WITH NATURAQUA OILS		
Before applying the product, rinse the surface with plenty of water		
1	<b>0075 Naturaqua Exterior Wood Cleaner</b>	
Rub the surface and rinse with water. Proceed with the next application on wet wood.		
2	<b>0026 Naturaqua Deck Soap Cleaner</b>	
For a particularly neat result we recommend sanding the surface before applying the finishing		
Reccomendations for a subsequent finishing: ideal for waterborne oils as Naturaqua Teak Oil, Naturaqua Decking Oil.		

### Exterior Oil Refresher



CYCLE FOR MAINTENANCE / REGULAR RECOVERY OF EXTERIOR OIL-TREATED SURFACES		
On a clean surface		
1	<b>3975 Exterior Oil Refresher</b>	<ul style="list-style-type: none"> <li>• For recovery apply the product evenly</li> <li>• Drying time: 12h at 20°C</li> <li>• Approx. yield: 20-30 m<sup>2</sup>/Lt.</li> </ul>



# HOW TO GET A DECORATIVE EFFECT ON DECKS AND TERRACES FINISHED WITH BORMA WACHS OIL

## Wood Oil TEAK OIL

An oil-based product, ready for use, suitable for all wooden surfaces, both interior and exterior. It makes the surface water-repellent and gives the surface a pleasantly natural appearance. Also suitable for dipping. Protects against atmospheric and biological agents and enhances the natural beauty of the wood. Clear or pigmented, it does not flake and does not require sanding.



Customizable with  
Borma Colour  
System



Exposes the  
natural beauty  
of wood.



Code 0360

### Recommendations for application:

It can be used alone as a periodic treatment of surfaces or as a coloured base before finishing with a transparent oil (e.g. Decking Oil HD – Danish Oil).

## Danish Oil DECKING OIL HD

A highly decorative special oil mixture with low environmental impact. Odour-free and with high breathability, it protects every type of wood. It is characterised by rapid drying and its special UV filters and preservatives make it perfect for exterior use. Formaldehyde-free and available in 6 shades (see Colour Chart) plus Clear.



Protects and  
decorates



Personalizzabile  
con Borma Color  
System

Code 4971XX

### Recommendations for application:

Recommended as a transparent finish, it can be applied over various coloured products including Holz Lasur, Holzwachs Lasur 3IN1 and Teak Oil to increase its protection coefficient.





## Oil-based treatment for terraces and decks

# DECORATIVE EFFECT

## Teak oil + Decking oil HD

Remove any trace of oils, grease, dirt, dust and previous treatments.



1

**0360**  
**Teak oil**

- Drying time: 4 -6h
- Sanding: not necessary
- Approx. yield: 14-16 m<sup>2</sup>/Lt.



2

**4971**  
**Decking oil HD**

- Drying time: 8-12
- Sanding: not necessary
- Approx. yield: 16-20 m<sup>2</sup>/lt.



3

**4971**  
**Decking oil HD**

- Drying time: 24h
- Approx. yield: 16-20 m<sup>2</sup>/lt.

### Teak Oil Colour chart



171 Natural Teak



511 Oak



927 Larch




172 Teak



301 Cherry




621 Mahogany




581 Rosewood




1471 Wenge



631 Dark Oak



1461 Green Pine



1011 Grey




601 Ebony


### Decking Oil HD\* Colour chart




05 Pine




16 Cherry




17 Teak



53 Light Walnut




63 Dark Walnut



62 Mahogany

\*Clear version available

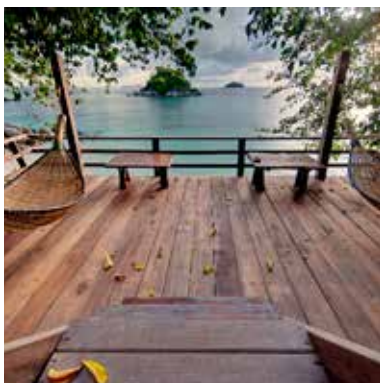



# NATURAL EFFECT ON DECKS AND TERRACES WITH BORMA WACHS OIL FINISHES

## Finishes for Terraces

### TERRACE OIL - Decking Oil Natural

A high-quality decking oil formulated on the basis of reinforced, natural oils, with a high penetration coefficient. Thanks to its low viscosity, it penetrates deep into the wood whilst its high solid content gives efficient protection and breathability without the potential for flaking. It gives a natural, satin effect. Enriched with UV filters and antiseptic additives, the product is characterised by extremely easy application, even when coloured, and requires no sanding for maintenance schedules.



Customizable with Borma Colour System



Penetrates deeply into the wood



Code 4971-IL

### Recommendations for application:

To obtain a more decorative effect and greater protection apply a coat of Decking Oil HD - Danish Oil as the final coat. Restore without sanding.





# Oil finishes for Decks and Terrace

## NATURAL EFFECT

### Terrace Oil - Decking Oil Natural

Rimuovere ogni traccia di oli, grassi, sporco, polveri, finiture precedenti



1

**4971-IL**  
Terrace Oil - Decking Oil Natural

- Drying time: 10-12h
- Sanding: not necessary
- Approx. yield: 16-20 m<sup>2</sup>/Lt.



2

**4971-IL**  
Terrace Oil - Decking Oil Natural

- Drying time: 24h
- Approx. yield: 16-20 m<sup>2</sup>/Lt.

### Terrace Oil - Decking Oil Natural Colour chart



174 Natural Iroko



512 Oak




729 Larch




173 Teak



302 Cherry



622 Mahogany




582 Rosewood




1472 Wenge




632 Dark Walnut



1462 Green Pine





1012 Grey



601 Black Ebony

\*Also available white

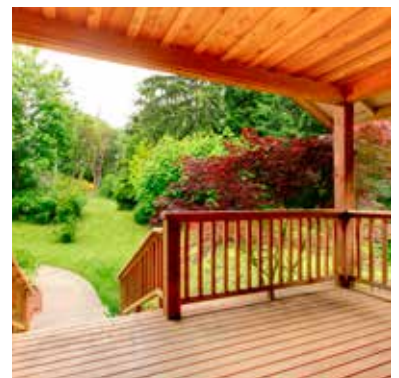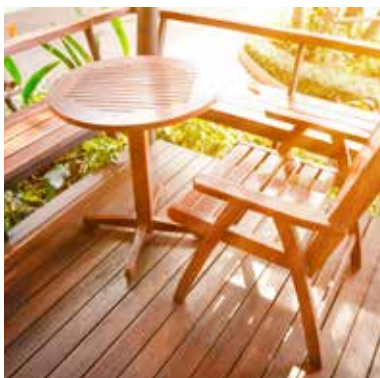



# BORMA WACHS OIL FINISHES FOR TERRACES IN THERMO-TREATED WOOD.

## Finishes for Thermo-Treated Wood THERMOWOOD OIL

Thermo-treated wood is very dense and compact which often prevents proper adhesion of conventional finishing products. Thermowood Oil is formulated specifically for deep penetration and therefore to be well-absorbed also by difficult surfaces with minimum wetting. Enriched with UV filters and protective additives it creates a protective film resistant to wear. It is ideal for all manufactured pieces in heat-treated wood including floors, terraces and decks. Available in 4 colours with a natural effect, plus clear. Application of at least two coats is recommended.



Customizable with  
Borma Colour  
System



High  
penetration



Code 4978XX

### Recommendations for application:

The product is ready for use, but in the event of particularly dense/compact surfaces, the first coat of Thermowood Oil can be diluted at 50% with Solvoil 06, Slow Drying Solvent. Subsequent coats should not be diluted.







# Oil finishes for terrace

## THERMO-TREATED WOOD

### Thermowood Oil

Rimuovere ogni traccia di oli, grassi, sporco, polveri, finiture precedenti



1

**4978**  
**Thermowood Oil**

- Drying time: 8-12h
- Sanding: not necessary
- Approx. yield: 20-24 m<sup>2</sup>/Lt.



2

**4978**  
**Thermowood Oil**

- Drying time: 24h
- Approx. yield: 20-24 m<sup>2</sup>/Lt.

### Thermowood Oil Colour chart



08 Natural



53 Light



59 Medium



63 Dark

\*Also available transparent



# HIGH PERFORMANCE BORMA WACHS OIL FINISHES FOR DECKS AND TERRACES

## Special Protective Waterbased Primer NATURAQUA BORMA SHIELD

A waterbased, odourless and quick-drying Primer formulated to protect newly built, wooden structures while waiting for the subsequent finishes. It provides effective protection against mildew, fungi formation and insect infestation, even in the absence of other treatments. It does not change the colour of the wood and allows the subsequent application of any finish.



### Recommendations for application:

The product can be used as a pre-treatment before exterior woodstain products, lacquers or finishes in general. Thanks to the high content of active ingredients, it is recommended for waterbased finishing cycles to guarantee greater protection and prolong the duration of the coating. For Exterior use.

## Two Components Oil DECKING OIL 2K

Mix of natural oils, with zero emissions, especially formulated to protect exterior wooden surfaces. Enriched with UV filters and preservatives, it guarantees advanced protection against atmospheric and biological agents. The addition of the catalyser increases its surface performance, making it an ideal finish for terraces and decks in exotic wood. Odour-free, available in the colours on the chart, it can be customised to your desired colour using the oil pigments.



### Recommendations for application:

Supplied ready for use. To facilitate brush application dilution with Solvoil Plus is recommended but this must be after adding the catalyist. Avoid application on heated surfaces or in direct sunlight. Application of the product must be carried out as evenly and continuously as possible, without stopping.





# Oil finishes for Decks and Terrace

## HIGH PERFORMANCE

### Naturaqua Borma Shield + Decking oil 2K

Remove all traces of oils, greases, dirt, dust, previous finishes



1	<p><b>Recommended:</b>  <b>NAT3630</b>  <b>Naturaqua Borma Shield</b>  <b>Special Primer</b></p>	<ul style="list-style-type: none"> <li>• Drying time: 2h</li> <li>• Sanding: not necessary</li> <li>• Approx. yield: 16-20 m<sup>2</sup>/Lt.</li> </ul>
---	--	---



2	<p><b>49712K</b>  <b>Decking Oil 2K</b></p>	<ul style="list-style-type: none"> <li>• Drying time: none, to proceed wet-on-wet within 12 h</li> <li>• Sanding: not necessary</li> <li>• Approx. yield: 30-50 m<sup>2</sup>/Lt.</li> </ul>
---	---	--




3	<p><b>49712K</b>  <b>Decking Oil 2K</b></p>	<ul style="list-style-type: none"> <li>• Drying time: 24-36h</li> <li>• Approx. yield: 30-50 m<sup>2</sup>/Lt.</li> </ul>
---	---	---


#### Decking Oil 2K\* Colour chart




05 Pine




16 Cherry




17 Teak



53 Light Walnut




63 Dark Walnut



62 Mahogany

\*Also available transparent

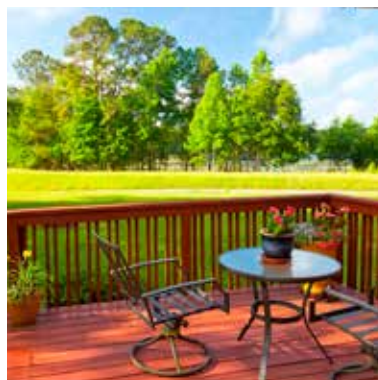



# BORMA WACHS WATERBASED OIL FOR WOODEN TERRACES AND DECKS

## Waterbased Oil NATURAQUA DECKING OIL

Naturaqua Decking Oil is a blend of emulsified oils in water reinforced with resins to treat wood intended for outdoor environments. Supplied ready for use, over time, it can deteriorate but does not flake and is easily revitalised. It is easy to apply and has excellent penetration. Produced with the highest quality raw materials and enriched with special UV filters, it guarantees excellent protection against atmospheric agents. Especially for exterior wood. Available in 6 shades (see Colour Chart) plus Transparent/Clear.



Customizable with  
Borma Colour  
System



Ready to  
use. Easy  
application.



Code NAT4971XX

### Recommendations for application:

Do not apply on heated wood or in direct sunlight.





# Oil finishes for Terraces and Decks

## WATERBASED OIL

### Naturaqua Decking Oil

Remove all traces of oils, greases, dirt, dust, previous finishes



1

**NAT4971**  
**Naturaqua Decking Oil**

- Drying time: 8h
- Sanding: not necessary
- Approx. yield: 14-16 m<sup>2</sup>/Lt.



2


**NAT4971**  
**Naturaqua Decking Oil**

- Drying time: 24-36h
- Approx. yield: 14-16 m<sup>2</sup>/Lt.


### Decking Oil 2K\* Colour chart




05 Pine




16 Cherry




17 Teak



53 Light Walnut




63 Dark Walnut



62 Mahogany

\*Also available transparent

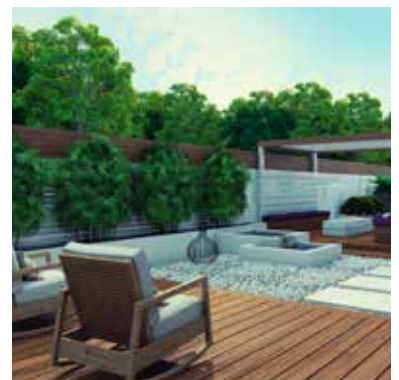



# BORMA WACHS WATERBORNE OIL FOR TERRACES AND DECKS IN WPC COMPOSITE WOOD (Wood + Plastic)

## Waterbased Oil NATURAQUA WPC DECK SEALER

Treatment based on oils, waxes and natural resins dispersed in water, created for the protection of composite materials, such as WPC, precompressed wood etc. Quick to dry, it is strongly water- and oil-repellent, allowing to avoid the formation of unpleasant and persistent stains caused by the absorption of oily substances and dirt. Enriched with UV filters, it penetrates deeply and guarantees a great adhesion and protection of the treated surfaces. When dry, it permits to create a pleasant natural effect without changing the WPC tone.




Ideal for  
composite  
wood



Code NAT4966XX

**Recommendations for application:**  
Apply evenly by brush or roller.

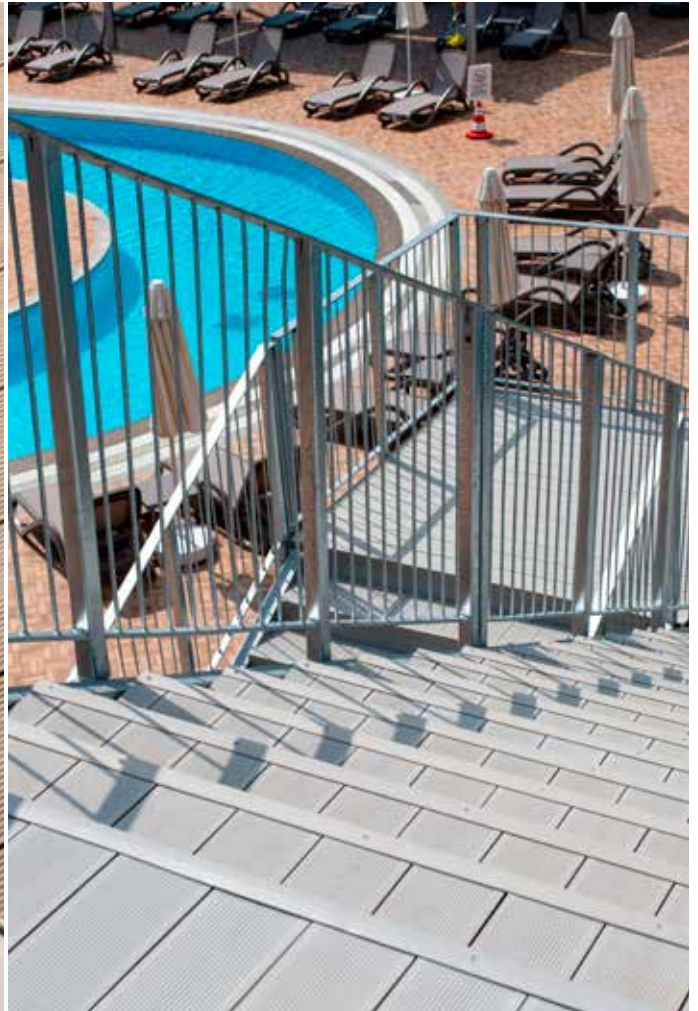





# Oil finishes for Terraces and Decks

## WATERBASED OIL

### Naturaqua WPC Deck Sealer

Remove all traces of oils, greases, dirt, dust, previous finishes



1

NAT4966XX  
Naturaqua WPC Deck Sealer

- Overcoatable: 2-4 h at 20°C
- Sanding: not necessary
- Approx. yield: 12-16 m<sup>2</sup>/Lt.



2

NAT4966XX  
Naturaqua WPC Deck Sealer

- Final drying time: 6-12 h at 20°C
- Approx. yield: 14-18 m<sup>2</sup>/Lt.




# HIGH PERFORMANCE DECORATIVE BORMA WACHS LACQUERS FOR DECKS AND TERRACES

## Translucent Exterior Woodstain HOLZ LASUR

Protective and decorative exterior woodstain for interiors and exteriors with depth wetting properties. It colours the wood, enhancing the grain. It contains UV filters and antiseptic additives that provide effective protection against fungi and insects. Colours are light resistant and have good resistance to atmospheric agents.



Customizable with  
Borma Colour  
System



Ideal to stain  
and protect  
wood



Code 3610XX

### Recommendations for application:

Naturaqua Holz Lasur colours are normally brighter, however solvent-based Holz Lasur is characterised by a better penetration and protection capacity. Apply by brush, spray, dipping.

## Two-component lacquer EXTERIOR WOOD LACK 2K

A two-component lacquer ideal for exterior flooring and wooden surfaces in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and normal wear, guaranteeing a long duration over time.

Available in the following gloss levels: Natural Effect 0-5%, Semi-Matt 20-30%, Satin 50-60%, glossy 80-90%.

Available also in THIXO version for vertical surfaces.



Protegge e  
decora.  
Alte prestazioni.



Customizable with  
Borma Colour  
System

Code 4971XX



### Recommendations for application:

A specific primer is not required, but Holz Lasur can be applied as a first coat to ensure the coating lasts longer. Recommended application of two or three coats, with a roller, spray or brush. Avoid application on heated surfaces or in direct sunlight.





# Lacquer cycle for terraces and decks

## DECORATIVE EFFECT - HIGH PERFORMANCE

### Holz Lasur + Exterior wood Lack 2K

Remove all traces of oils, greases, dirt, dust, previous finishes



1	<b>3610</b> <b>Holz Lasur</b>	<ul style="list-style-type: none"> <li>• <b>Drying time:</b> 12 - 24 h</li> <li>• <b>Sanding:</b> not necessary</li> <li>• <b>Approx. yield:</b> 10-14 m<sup>2</sup>/Lt.</li> </ul>
2	<b>41102K-XX + 4110K</b> <b>Exterior wood Lack 2K</b>	<ul style="list-style-type: none"> <li>• <b>Drying time:</b> 12 h</li> <li>• <b>Sanding:</b> grit 150 - 180</li> <li>• <b>Approx. yield:</b> 10-14 m<sup>2</sup>/Lt.</li> <li>• <b>Recommended use:</b> 100-120 m<sup>2</sup>/Lt.</li> </ul>
3	<b>41102K-XX + 4110K</b> <b>Exterior wood Lack 2K</b>	<ul style="list-style-type: none"> <li>• <b>Drying time:</b> 24 - 48h</li> <li>• <b>Sanding:</b> 150 - 180 grit in case of a three-coats cycle</li> <li>• <b>Approx. yield:</b> 10-14 m<sup>2</sup>/Lt.</li> </ul>

### Holz Lasur Colour chart





# HIGH PERFORMANCE DECORATIVE WATERBORNE BORMA WACHS LACQUERS FOR DECKS AND TERRACES

## Waterborne Exterior Woodstain NATURAQUA HOLZ LASUR

A waterbased protective and decorative woodstain for interiors and exteriors which colours the wood and enhances the grain. Colours are light resistant due to the inclusion of UV filters whilst special additives provide efficient protection against fungi and insects. Good resistance to atmospheric agents.



### Recommendations for application:

To optimise the lifespan of the coating it is recommended that a finishing coat of Naturaqua Top Gel is applied. Recommended application: brush, spray, dipping.

## Two component waterbased lacquer NATURAQUA EXTERIOR WOOD LACK 2K

A two component waterbased lacquer ideal for exterior flooring and wooden surfaces in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and against normal wear. Being natural it does not affect the wood shade. Available in the following gloss levels: Natural Effect 10-20%, Semi-Matt 30-40%, Satin 50-60%, Gloss 80-90%.



### Recommendations for application:

To guarantee the best performance dilute the first coat 1:1 with water or Wood Sealer. Avoid application on heated surfaces or in direct sunlight. Catalysis ratio: 10:1 - Pot life: 2-3 hours at 20°C.





# Water-based laquer cycle for terraces and decks

## DECORATIVE EFFECT - HIGH PERFORMANCE

### Naturaqua Holz Lasur + Naturaqua Exterior wood lack 2k

Remove all traces of oils, greases, dirt, dust, previous finishes



1

**NAT3610**  
**Naturaqua Holz Lasur**

- Drying time: 4h
- Sanding: yes
- Approx. yield: 16-20 m<sup>2</sup>/Lt.



2

**Naturaqua Exterior wood lack 2k**

- Drying time: 12h
- Sanding: yes
- Approx. yield: 10 m<sup>2</sup>/lt.



3

**Naturaqua Exterior wood lack 2k**

- Drying time: 36h
- Approx. yield: 10 m<sup>2</sup>/lt.

### Naturaqua Holz Lasur Colour chart



08 Clear




05 Pine



03 Oak



17 Teak/Chestnut



10 Larch



54 Douglas



16 Cherry




62 Mahogany




53 Light Walnut



59 Medium Walnut



63 Dark Walnut



136 Pine Green





THE IDEAL  
TREATMENT **FOR YOUR**  
**GARDEN FURNITURE**



# CLEAN AND RENEW THE GARDEN FURNITURE

## Wood Reviver

### NATURAQUA BORMA NO GREY

A waterbased detergent to restore wood to its natural colour. Remove surface greyness caused by decomposition of wood under the action of natural ultraviolet radiation. Apply to the wet surface, leave to act for 5 minutes, then clean the wood with a hard brush. After application, rinse with plenty of water. Ideal for reviving garden furniture, fences and decking.



#### Recommendations for application:

Scrub the surface with a paintbrush or brush whilst the surface is still wet. The result is immediate. If necessary, repeat the operation.



## Cleaning and recovery

# ANTI-GREY WATERBORNE REVIVER

## Naturaqua Borma No Grey



1	<b>SB5700</b> <b>Naturaqua Borma No Grey</b>	<ul style="list-style-type: none"> <li>• <b>Rub and remove dirt</b></li> <li>• <b>Approx. yield: 8-12 m<sup>2</sup>/Lt.</b></li> </ul>
2	<b>SB5700</b> <b>Naturaqua Borma No Grey</b>	<ul style="list-style-type: none"> <li>• <b>Final drying time - 6-12 h at 20°C</b></li> <li>• <b>Approx. yield: 4-18 m<sup>2</sup>/Lt.</b></li> </ul>
	Proceed to treatment with Teak Oil or Garden Furniture Oil. Water-based treatments should preferably be avoided.	





# WATERBORNE BORMA WACHS OIL NATURAL TREATMENT

## Waterbased Teak Oil NATURAQUA TEAK OIL

Oils in aqueous dispersion reinforced with resin ready for use for interiors and exteriors. Odour-free, the product provides a non-greasy, protective film which is perfectly water-resistant, with a pleasant satin appearance. Easily applied, the oil penetrates deeply to protect the wood from adverse weather conditions and harmful agents, developing tone and natural beauty. Enriched with UV filters.



Penetrates deeply. Emphasizes the tone of the wood.



Code NAT0361

### Recommendations for application:

Do not apply on heated wood, or in direct sunlight.







## Oil finishes for outdoor wooden furniture

# WATERBORNE OIL

## Naturaqua Teak Oil

Remove all traces of oils, greases, dirt, dust, previous finishes



1

**NAT0361**  
**Naturaqua Teak Oil**

- Apply evenly with a brush.
- Overcoatable time: 2-4 h at 20°C.
- Sanding: not necessary
- Approx. yield: 12-16 m<sup>2</sup>/Lt.



2

**NAT0361**  
**Naturaqua Teak Oil**

- Apply the second coat with a brush
- Drying time: 6-12h
- Approx. yield: 14-18 m<sup>2</sup>/Lt.

### Naturaqua Teak Oil Colour chart



171 Natural Teak



511 Oak



927 Larch




172 Teak




301 Cherry




621 Mahogany




581 Rosewood



1471 Wenge




631 Dark Oak



1461 Green Pine



1011 Grey



601 Ebony



# SEMI-MATT DECORATIVE EFFECT BORMA WACHS FINISHING FOR THE BEST TREATMENT OF YOUR GARDEN FURNITURE

## Outdoor finishes for garden furniture GARDEN FURNITURE OIL

An odorless finish based on oils, waxes and natural resins. Water repellent, transpiring, excellent impregnation and consequent protection from atmospheric agents, no exfoliation phenomena. Contains UV filters and additives functional to ensure a good protection of the garden furniture. Over time it is subject to natural degradation. In order to renew the protection it is sufficient to apply a new coat of oil on a dry and clean surface, without the need for preliminary sanding. Semi-gloss decorative effect.



Protection with a semi-gloss decorative effect.



Code 4130

### Recommendations for application:

Garden Furniture Oil creates a pleasant natural satin effect.





# Finishing for wooden garden furniture

## OIL WITH NATURAL WAXES AND RESINS

### Garden Furniture Oil + Garden Furniture Oil

Remove all traces of oils, greases, dirt, dust, previous finishes



1

**4130**  
**Garden Furniture Oil**  
Pigmented version

- Apply evenly by brush.
- Drying time: 4-6h at 20°C depending on coat thickness
- Approx. yield: 12-20 m<sup>2</sup>/lt.



2

**4130**  
**Garden Furniture Oil**  
Pigmented version

- Apply a second coat (also wet on wet)
- Drying time: 24-48h depending on coat thickness
- Approx. yield: 18-24 m<sup>2</sup>/lt.


### Garden Furniture Oil Colour chart



50 White




08 Transparent



05 Pine




03 Oak



52 Dark Oak



17 Teak




10 Larch




54 Douglas



16 Cherry




62 Mahogany



53 Light Walnut



59 Medium Walnut




63 Dark Walnut




58 Rosewood



146 Wenge



136 Green Pine

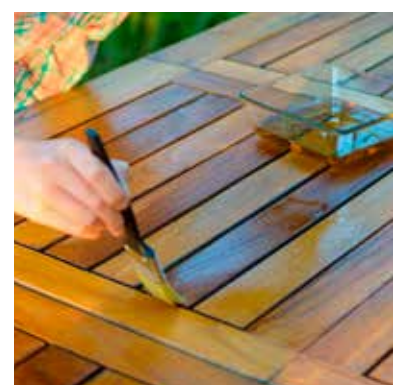





[www.bormawachs.com](http://www.bormawachs.com)





**BORMA WACHS**<sup>®</sup>  
Wood Professional Cosmetics  
& Eco-Finishes



Restauro - Restoration - Restaurierung  
Материалы для реставрации



Ritocco e stucchi - Touch-Up and Fillers - Retusche und Kitte  
Ремонт покрытий



Esterni - Exteriors - Aussenbereich - Экстерьеры



Interni - Interiors - Innenbereich - Интерьеры



Doratura - Gilding - Vergoldung - Золочение



Decorazione - Decoration - Dekoration - Декорирование



Borma Pro



Borma Colors

**B.P.S. s.r.l.**

Via Industria, 4 - 30029 San Stino di Livenza  
Venezia Italy

Tel. +39 0421 951900 - Fax +39 0421 951902

# Wood Professional Cosmetics & Eco-Finishes